

Link do produktu: <https://energyoze.pl/zestaw-solarny-off-grid-przetwornica-230v-5000w-magazyn-5kwh-panele-1760wp-akumulator-inwerter-p-25.html>




Zestaw solarny Off-Grid
Przetwornica 230V 5000W
Magazyn 5kWh Panele
1760Wp Akumulator
Inwerter

Cena	6 599,00 zł
Cena poprzednia	6 699,00 zł
Dostępność	Dostępny
Czas wysyłki	24 godziny
Numer katalogowy	130639669
Kod producenta	13049524557
Kod EAN	59027514124356

Opis produktu




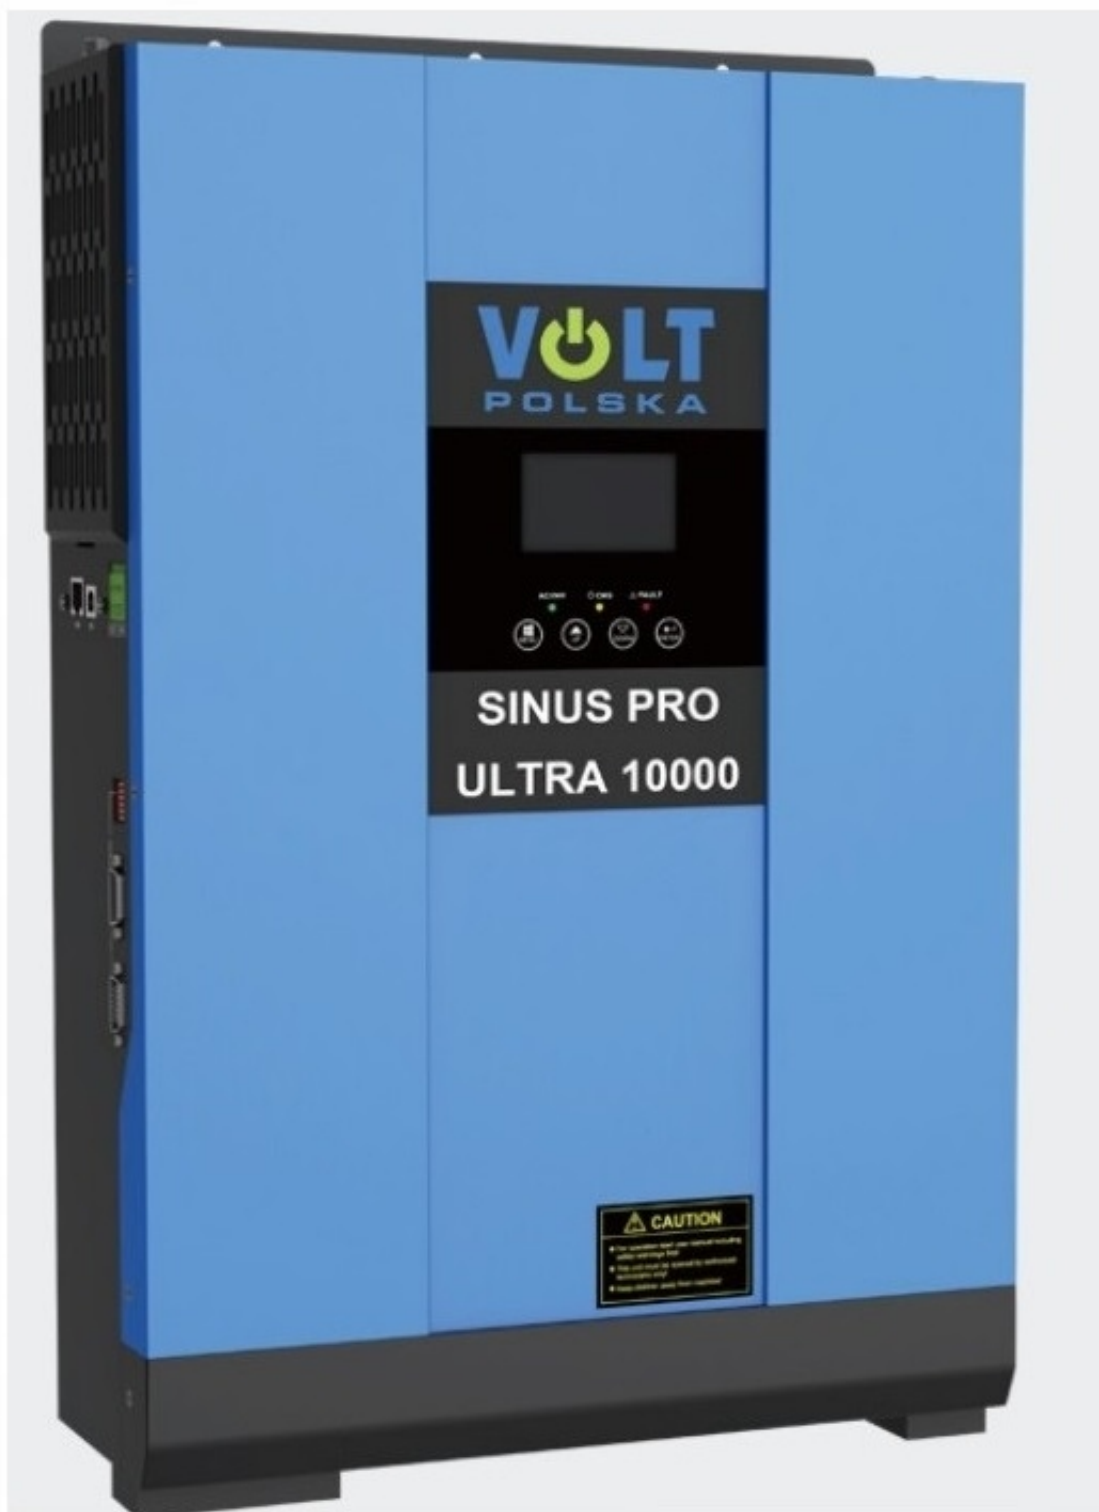







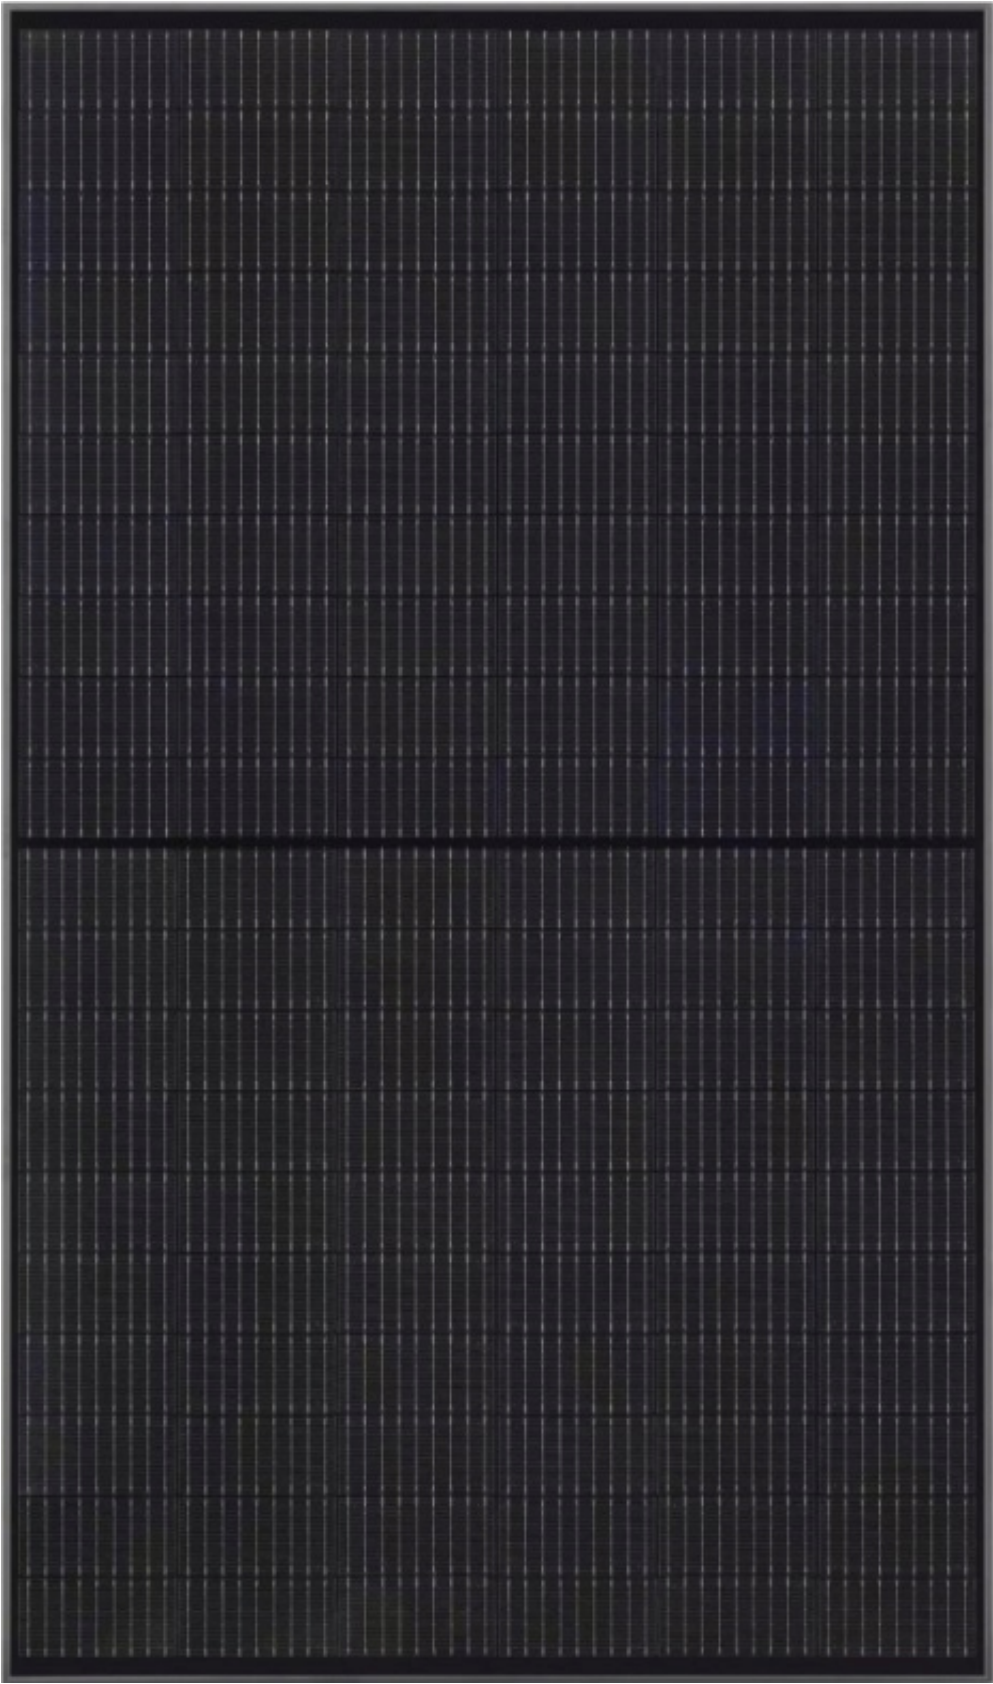

Dane techniczne panelu fotowoltaicznego:

- Producent: **JaSolar**
- Moc: **445 Wp**
- Długość: **1762 x 1134 x 30 mm**
- Kolor ramy: **Czarny FULLBLACK**
- Seria: **TIGER NEO N-TYPE**
- Materiał ogniwa: **Monokrystaliczny**
- Liczba ogniw: **108**
- Max. Napięcie: **1000 [V]**
- Napięcie Vmp: **32.47 [V]**
- Prąd Isc: **14.31 [A]**
- Napięcie otwartego obwodu: **38,90 [V]**
- Prąd zwarciov: **14.31 [A]**
- Sprawność STC: **22 [%]**
- Degradacja w ciągu 25 lat: **0.4 [%]**
- Tolerancja mocy: **3 [%]**
- Wsp. Temp. Pmpp: **-0.29 [%/C]**
- Wsp. Temp. Uoc: **-0.25 [%/C]**
- Waga: **22 [kg]**
- Temperatura pracy: **-40 do +85 [°C]**
- Typ: **Bifacial (Dwustronny)**

•



VOLT
POLSKA

12V/100Ah

AGM 100Ah

MAINTENANCE-FREE VRLA AGM BATTERY

AGM-100 12V100Ah



Minimum safe discharge voltage: 10.7 V DC
FLOAT charge voltage (25°C): 13.5-13.8 V DC
NORMAL charge voltage (25°C): 14.4 V DC
BOOST charge voltage (25°C): 14.7 V DC
Recommended charging current: 10 A DC
Maximum charging current: 25 A DC
C20 buffer discharge current: 5 A DC
WARNING: Non-compliance with the specified parameters may damage the battery and void the warranty.

Application for buffer operation:
emergency power systems, alarms, telecommunications, UPS

Recommendations:
Store the battery in a dry and cool place, away from water, heat and open flame.
Monitor the battery voltage regularly to ensure that it is within the range recommended by the manufacturer.
Do not discharge the battery below the specified permissible voltage, as this will shorten its service life.
Store the battery only in a charged state. Recharge the battery to maximum every 6 months.



VOLTPOLSKA.PL



AGM 12V 100 Ah

6AKUXAG100

